deepTester_leaflet_v20

deepTESTER – WATER DEPTH TESTER deepGROUND - BOTTOM DEPTH TESTER deepSLUDO - SEDIMENT DEPTH TESTER



deepTESTER

Standard depths: 15m, 30m, 50m, 100m, 150m, 200m, 300m, 500m, others

WATER – water level probe. Generates an alarm when it comes into contact with the water surface.

WATER + BOTTOM – bottom measuring probe. It generates a signal in the event of contact with the bottom and with water.


SLUDGE – sludge measurement probe. It generates a signal when a layer of sediment is detected in the tank.

ADDITIONAL ACCESSORIES


SAFETY CASE – two layers of material + sponge

TAPE GUIDE – A cable guide to protect against tape damage.

SAMPLING BAILER – inox sampling bailer with capacity of 200ml/500ml/1000ml.

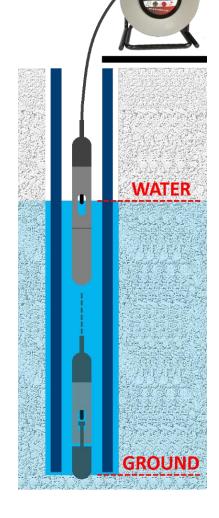


Different ways of application.

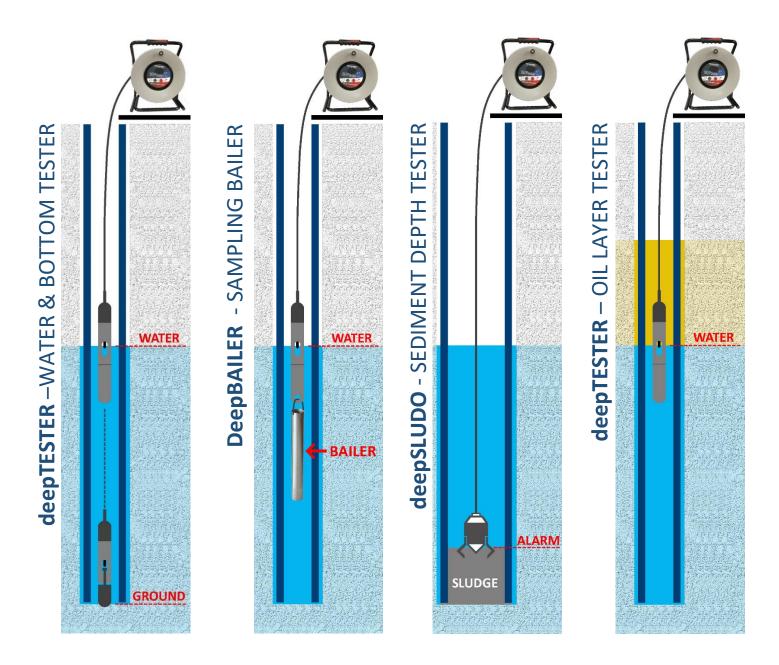

Technical parameters of the tape measure.



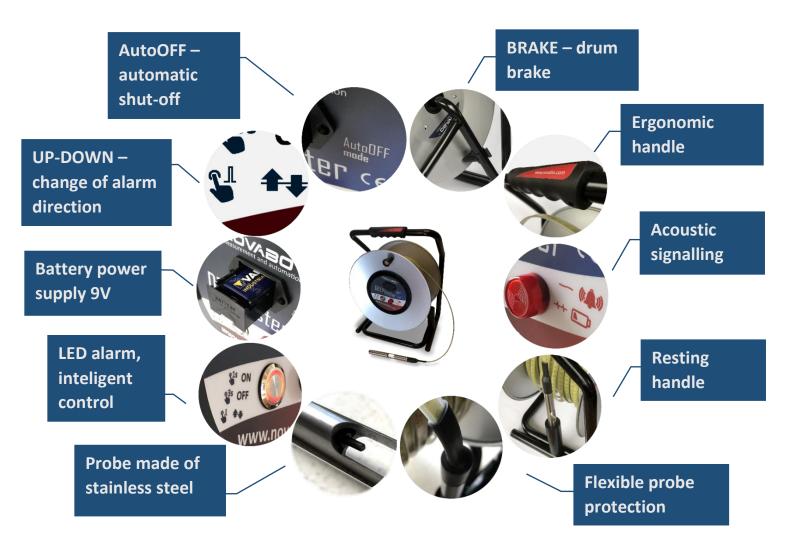

Technical Parameters

The set includes	Drum with ruler + 14 probe (optional 16 mm)
Construction	Solid metal construction + resting handle
Supply voltage	easily replaceable R9V battery
Alarm	Acoustics (buzzer) + optics (LED)
Construction of the cable	reinforced with a metal tape to protect against stretching
Available lengths	15m, 30m, 50m, 100m, 150m, 200m, 300m, 500m lub większe
Accuracy	up to 1mm
Probe	IP 68, stainless steel, process plastic
AUTO-OFF	automatic shutdown at the end of the tests
BRAKE	brake to stop the drum from rotating
SAMPLER (optional)	Sampling bailer 200ml/500ml/1000ml + probe with bailer mount
BOTTOM PROBE (optional)	Accessory for measuring the depth of the bottom
SAFETY CASE (optional)	The bag is made of three layers of material, with a sponge
TAPE GUIDE (optional)	Cable guide to protect against damage



