



nSig A set used for acoustic and optical signaling with the option of wall mounting.

Kit content




- 1. Power supply
- 2. Bracket
- 3. Siren

- 1. Power supply 230V AC / 12V DC
- 2. Mounting bracket
- 2. Siren with acoustic and optical signaling

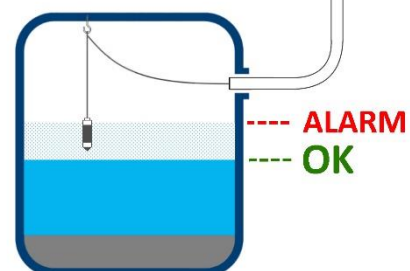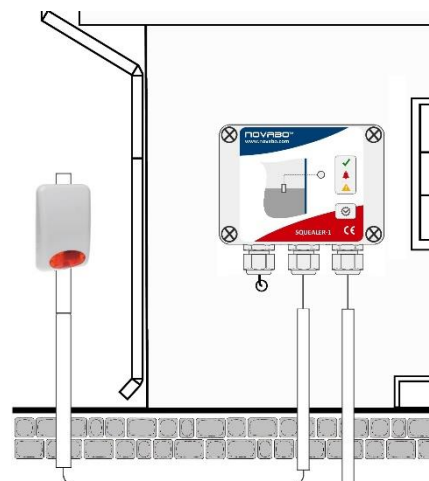

Connection of the signaler

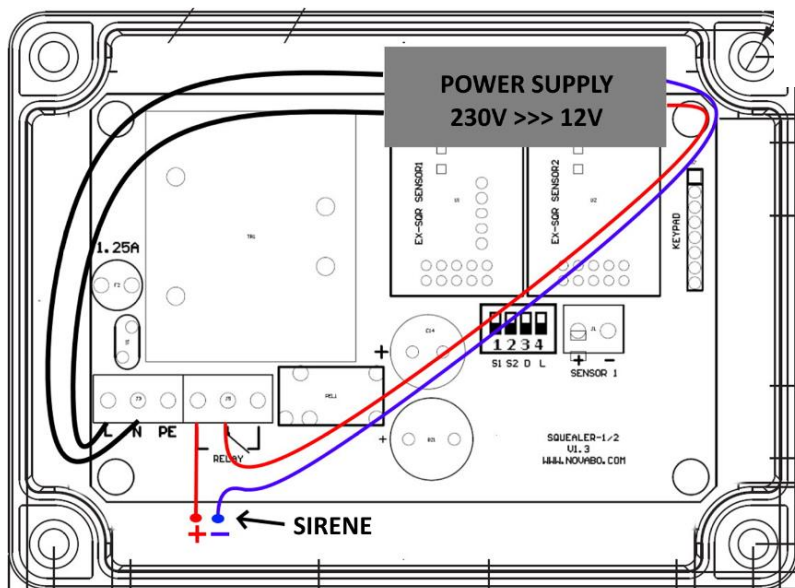

Technical specification

Siren specification	Siren
Max current consumption	285mA
Voltage	12V DC
Sound pressure	120dB
Working temperature	-35°C ÷ +55°C

Power supply	
Voltage In/Out	230VAC/12VDC
Working temperature	-35°C ÷ +55°C